

Facestock

A specially-coated, extra white, woodfree printing paper with an even smoother micro-absorbent surface structure.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	85 g/m ²	ISO 536
Caliper	77 µm	ISO 534

Adhesive

A general purpose removable, acrylic based adhesive.

Liner

BG40 brown, supercalendered glassine paper.

Basis Weight	54 g/m ²	ISO 536
Caliper	47 µm	ISO 534

Laminate

Total Caliper	136 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	4 N/25mm	FTM 9 Glass
Peel Adhesion 90°	2 N/25mm	FTM 2 St.St.
Min. Application Temp.	-15 °C	
Service Temperature	-30 °C to 80 °C	

Adhesive Performance

The adhesive features good tack and adhesion in combination with superior and clean removability from most substrates. Good UV resistance and long term removability. The adhesive allows label application at a wide temperature range and it retains its removable properties even at very low temperatures.

Applications and Use

Transfer Plus is a specially coated extra white paper providing :
 - Compatibility with a wide range of wax and wax-resin, thermal transfer ribbons.- Excellent print resolution of picket fence and rotated barcodes.- Thermal transfer print speeds up to 225 mm/sec.Application include: inventory, address, product identification and pharma labeling.Our Transfer face materials are developed and selected in close co-operation with leading Thermal Transfer ribbon manufacturers. The print quality of the Thermal Transfer system depends on the correct match of Thermal Transfer ribbon, printer and printing surface, therefore it is strongly recommended that careful selection should be made to optimise print results.Refer to ribbon/receiver compatibility guide for further information.

R5000N removes clean from many substrates from polymeric (e.g. PET, PP, ABS), card and fibre board, aluminium, stainless steel or glass (not suitable for window labelling). The use of R5000N adhesive on certain types of cardboards, or recycled fibres can be critical and it is strongly recommended to proceed to application testing before use.


Conversion and Printing

The material can be converted and printed by all conventional printing technologies. Areas of the label designated for imprinting should not be printed or varnished prior to imprinting.

AM135

Fasson ®

TRANSFER PLUS FSC R5000N-BG40BR

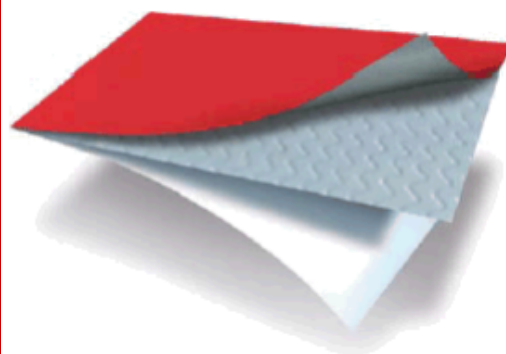

TRANSFER PLUS FSC

R5000N

BG40BR



The mark of responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Compliance and Approvals

R5000N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive R5000N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 2 according to the Commission Regulation (EU) No 10/2011, with vegetable oil as fatty food simulant used for migration testing.

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2023 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.