

Facestock

A 'frangible' semi-gloss white cast PVC film.

| | | |
|--------------|---------------------|---------|
| Basis Weight | 70 g/m ² | ISO 536 |
| Caliper | 60 µm | ISO 534 |

Adhesive

A special purpose permanent, solvent acrylic adhesive.

Liner

BG50 white, a supercalendered glassine paper.

| | | |
|--------------|---------------------|---------|
| Basis Weight | 80 g/m ² | ISO 536 |
| Caliper | 68 µm | ISO 534 |

Laminate

| | | |
|---------------|------------|---------|
| Total Caliper | 105 µm±10% | ISO 534 |
|---------------|------------|---------|

Performance Data

| | | |
|------------------------|------------------|--------------|
| Initial Tack | 15 N/25mm | FTM 9 Glass |
| Peel Adhesion 90° | 9 N/25mm | FTM 2 St.St. |
| Min. Application Temp. | 10 °C | |
| Service Temperature | -50 °C to 110 °C | |

Adhesive Performance

The adhesive features good initial tack and ultimate adhesion on a wide range of substrates. A high durability to solvents, U.V. and ageing.

Applications and Use

The product is designed with extreme tamper evidence as a priority. The heavily filled face is highly frangible, of low caliper – giving little 'edge' to pick at - and conformable/semi squeezable to avoid accidental breakage after application. At the same time the face has been specially formulated with just enough tensile/tear strength to allow simple label shapes to be die cut and matrix stripped for subsequent automatic application where required. Typical applications include identification labels for instrument panels, warning signs and nameplates on electrical appliances as well as tamper evident security seals.

Conversion and Printing

The product can be printed via all conventional roll label technologies, including water based flexo, UV letterpress, thermal transfer and screen. It is essential that labels are cut cleanly to avoid tear propagation hence dies must be sharp and in good condition. Film grade flat bed, solid and magnetic rotary dies can all be used while all rotary tools should be proofed to the liner. It is recommended that corners are designed with as large a radius as is practical to facilitate matrix stripping. Rolls must be handled with care during slitting, transport and storage to avoid edge damage.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AW451

Fasson ®

PVC SEMI GLOSS WHITE UD S690-BG50WH

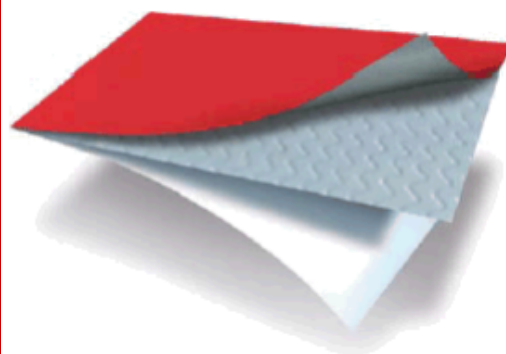

PVC UD SEMI GLOSS WHITE

S690

BG50WH

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2023 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.